


A170H

PHOTOELECTRIC ANGLE ENCODER



Precision photoelectric angle encoder A170H is used for precise angular displacement measurement of rotary tables, dividers, comparators, antennas and other high precision equipment.

It provides information about the value and direction of the motion. The encoder is used in automatic control, on-line gauging, process monitoring systems, etc.

The encoder has a rigid stainless steel construction and shaft collar coupling. Encoder is coupled via shaft collar.

Three versions of output signals are available:


- A170H-A - sinusoidal signals, with amplitude approx. 11 μ App;
- A170H-AV - sinusoidal signals, with amplitude approx. 1 Vpp;
- A170H-F - square-wave signals (TTL) with integrated subdividing electronics for interpolation x1, x2, x5, x10, x20, x25, x50 and x100.

The modification with distance-coded reference marks is available.




MECHANICAL DATA

Line number on disc (Z)	18000, 36000
Number Number of output pulses per revolution for A170-F	Z x k, where k = 1, 2, 3, 4, 5, 8, 10, 20, 25, 50, 100
Reference signal:	one per shaft revolution 36 per shaft revolution 72 per shaft revolution
Permissible mech. speed	≤ 1000 rpm
Max. operating speed (depends on number of output pulses)	300 to 500 rpm
Permissible shaft load:	
- axial	0,02 mm
- radial	0,02 mm
Accuracy	± 2.5 ; ± 5.0 arc. sec

Starting torque at 20°C	≤ 0.5 Nm
Rotor moment of inertia	$< 0.9 \times 10^{-3}$ kgm
Protection (IEC 529)	IP64
Maximum weight without cable	4.1 kg
Operating temperature	0...+70 °C
Storage temperature	-30...+85°C
Maximum humidity (non condensing)	98 %
Permissible vibration	≤ 100 m/s ²
Permissible shock (6 ms)	≤ 300 m/s ²

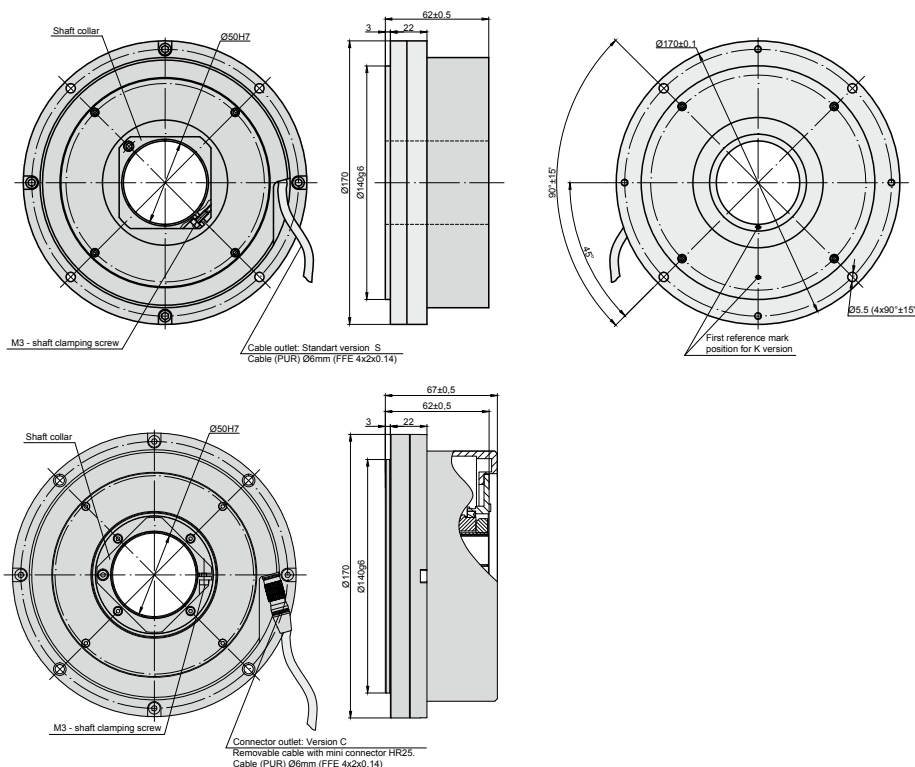


ELECTRICAL DATA

VERSION	A170H-A $\sim 11 \mu\text{App}$	A170H-AV $\sim 1 \text{Vpp}$	A170H-F \square TTL
Supply voltage (U_p)	+5 V \pm 5%	+5 V \pm 5%	+5 V \pm 5%;
Max. supply current (without load)	100 mA	120 mA	150 mA
Light source	LED	LED	LED
Incremental signals	Two sinusoidal I_1 and I_2 . Amplitude at 1 k Ω load: - $I_1 = 7 \dots 16 \mu\text{A}$ - $I_2 = 7 \dots 16 \mu\text{A}$	Differential sine +A/-A and +B/-B Amplitude at 120 Ω load: - A = 0.6...1.2 V - B = 0.6...1.2 V	Differential square-wave $U1/\overline{U1}$ and $U2/\overline{U2}$. Signal levels at 20 mA load current: - low (logic "0") $\leq 0.5 \text{ V}$ - high (logic "1") $\geq 2.4 \text{ V}$
Reference signal	One quasi-triangular I_0 peak per revolution. Signal magnitude at 1 k Ω load: - $I_0 = 2 \dots 8 \mu\text{A}$ (usable component)	One quasi-triangular +R and its complementary -R per revolution. Signals magnitude at 120 Ω load - R = 0.2...0.8 V (usable component)	One differential square-wave $U0/\overline{U0}$ per revolution. Signal levels at 20 mA load current: - low (logic "0") $< 0.5 \text{ V}$ - high (logic "1") $> 2.4 \text{ V}$
Maximum operating frequency	(-3 dB cutoff) $\geq 160 \text{ kHz}$	(-3 dB cutoff) $\geq 180 \text{ kHz}$	160-2500 kHz (depends on interpolation factor)
Direction of signals	I_2 lags I_1 for clockwise rotation (viewed from encoder mounting side)	+B lags +A for clockwise rotation (viewed from encoder mounting side)	$U2$ lags $U1$ with clockwise rotation (viewed from encoder mounting side)
Maximum rise and fall time	-	-	$< 0.5 \mu\text{s}$
Standard cable length	1 m, without connector	1 m, without connector	1 m, without connector
Maximum cable length	5 m	25 m	25 m
Output signals			

Note:

- Maximum working rotation speed (with proper encoder counting) is limited by maximum operating frequency and maximum mechanical rotation speed.
- If cable extension is used, power supply conductor cross-section should not be smaller than 0.5 mm².

MOUNTING REQUIREMENTS

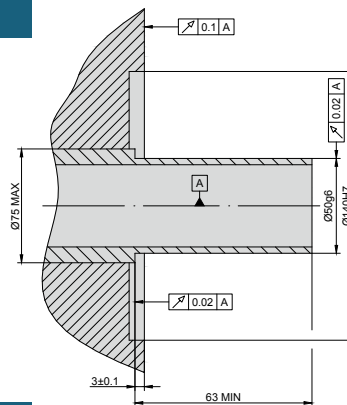

ACCESSORIES

CONNECTORS FOR CABLE	B12 12-pin round connector	C9 9-pin round connector	C12 12-pin round connector	D9 9-pin flat connector	D15 15-pin flat connector	RS10 10-pin round connector	ONC 10-pin round connector	HR25 8-pins round mini connector
DIGITAL READOUT DEVICES	CS3000				CS5000			
EXTERNAL INTERPOLATOR	NK							

ORDER FORM

OUTPUT SIGNAL VERSION:	PULSE NUMBER PER REVOLUTION:	OPTIONAL LINE NUMBER ON DISC (Z):	REFERENCE SIGNAL:	ACCURACY GRADE:	CABLE OR CONNECTOR OUTLET:	CABLE LENGTH:	CONNECTOR TYPE:
A AV F	1...18000 ... 1...3600000	18000 36000 *only for A170-F	S - one per revolution, K - distance-coded	25 - ± 2.5 arc.sec. 50 - ± 5.0 arc.sec.	S - version S (cable outlet) C-version C (connector outlet)	AR01 - 1m AR02 - 2m AR03 - 3m ...	W - without connector B12 - round, 12 pins C9 - round, 9 pins C12 - round, 12 pins D9 - flat, 9 pins D15 - flat, 15 pins RS10 - round, 10 pins ONC - round, 10 pins
ORDER EXAMPLES:	1) A170H-F-360000/36000-K-25-S-AR01/C12 2) A170H-F-360000-K-25-C-AR01/C12						